


# FM/MP3/Bluetooth Amplifier PA060PV

## Functional Features



1. Two channels MIC inputs, two channels auxiliary signal inputs, one channel built-in FM/MP3 input, one channel auxiliary output.
2. 100V/70V constant voltage output, 4~16Ω constant resistance output (unbalanced).
3. Built-in FM/MP3/Bluetooth audio source, remote controller makes it easily operate.
4. 6 zones output control.
5. MIC1 input port is top priority, other input signal will be restrained when it's working.
6. Independent volume control for each channel, treble and bass tone controller.
7. Over Current, Over Heat, Short-circuit protections.
8. Auto Temp-control fan force to cool it down.

## Front Panel

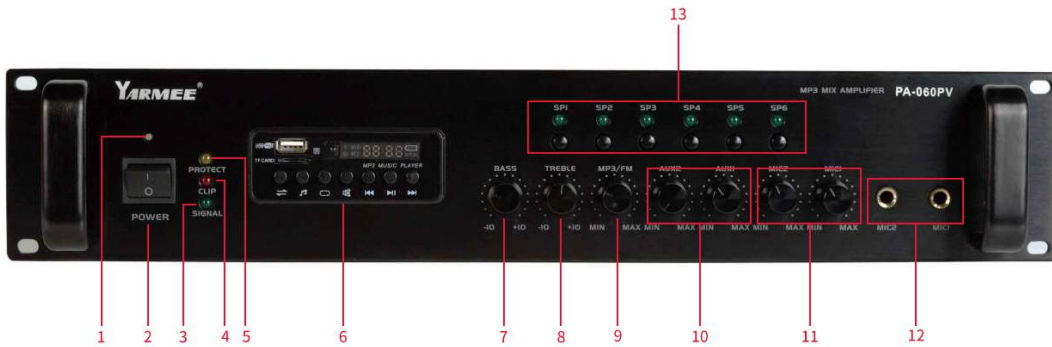


- |                         |                                 |                  |
|-------------------------|---------------------------------|------------------|
| 1. Power Indicator      | 6. MP3 Module                   | 11. MIC2/1 Vol   |
| 2. Power Switch         | 7. Bass                         | 12. MIC2/1 Input |
| 3. Signal Indicator     | 8. Treble                       | 13. Six Zone     |
| 4. Peak Indicator       | 9. MP3 Tuner Vol Output Control |                  |
| 5. Protection Indicator | 10. AUX2/1 Vol                  |                  |

## Back Panel



- |               |                    |                               |
|---------------|--------------------|-------------------------------|
| 1. Antenna    | 4. COM             | 7. 70V Output                 |
| 2. AUX Input  | 5. Six Zone Output | 8. Constant Resistance Output |
| 3. AUX Output | 6. 100V Output     | 9. AC Power Input             |

## MP3 Panel

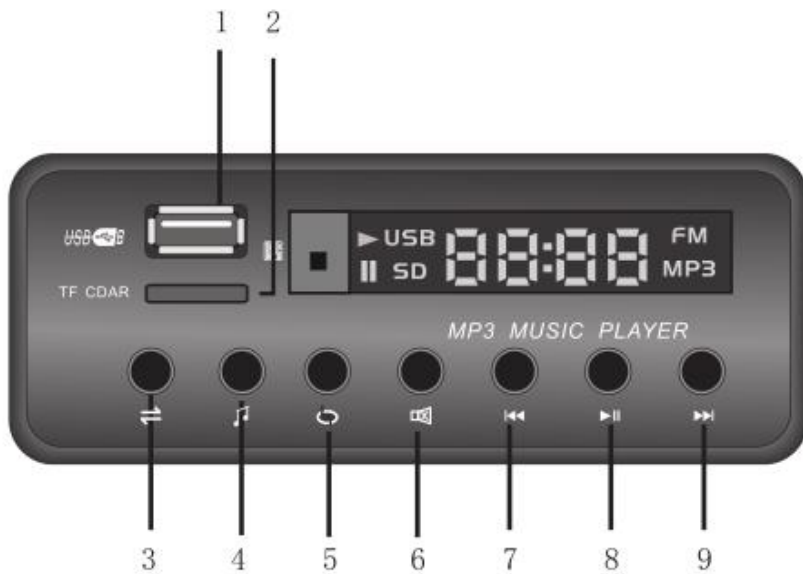

1. USB Port
2. TF Port
3. Signal Mode
4. EQ Mode
5. MP3 Play Mode  
(Repeat, Rewind)
6. Mute
7. Last/Vol-
8. Play/Pause
9. Next/Vol+

## Remove controller

